








Product card Refrigeration sandwich panel

SPW-C CORE^{PUR}

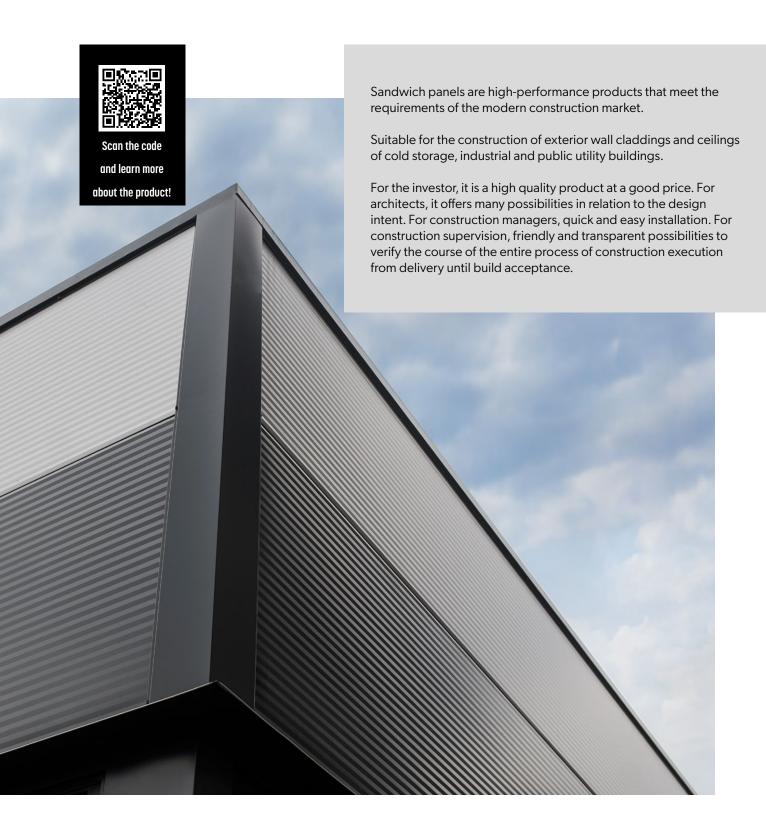

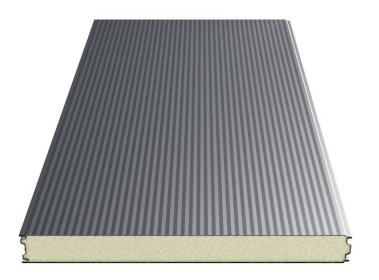

Panel cross-section

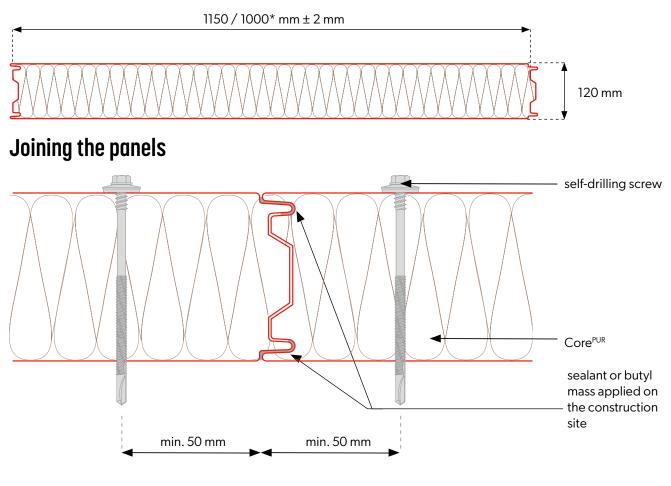


* Module availability is determined individually with the sales department..

Core	PUR
Density [kg/m³]	40±3
PUR panel thickness [mm]	120
Weight [kg/m ²]	11,9
Effective width [mm]	1150, 1000*
Total width [mm]	1171, 1021*
Min. panel length [m]	2,0
Max. panel length [m]	15,0
Outer/inner sheet thickness [mm]	0,3-0,7 / 0,3-0,7
U-value [W/m²K]	0,18
Fire spread degree	NRO
Type of external / internal profiling	[M], [T1], [R], [F] / [T1], [M], [F]
External / internal corrosion resistance	C1, C2, C3 (C4 ÷ C5) / A1 (A2 ÷ A5)
Standard coatings	Poliester Interior [INT], Poliester Standard [RAL], HERCULIT [HC], MULTILAYER 40 [MLT]
Special coatings	PVDF, PUR, PVC (P), PVC (F) - FoodSafe
Accessories	fixing system, seals, flashings, rooflight




Module availability is agreed individually with the sales department.

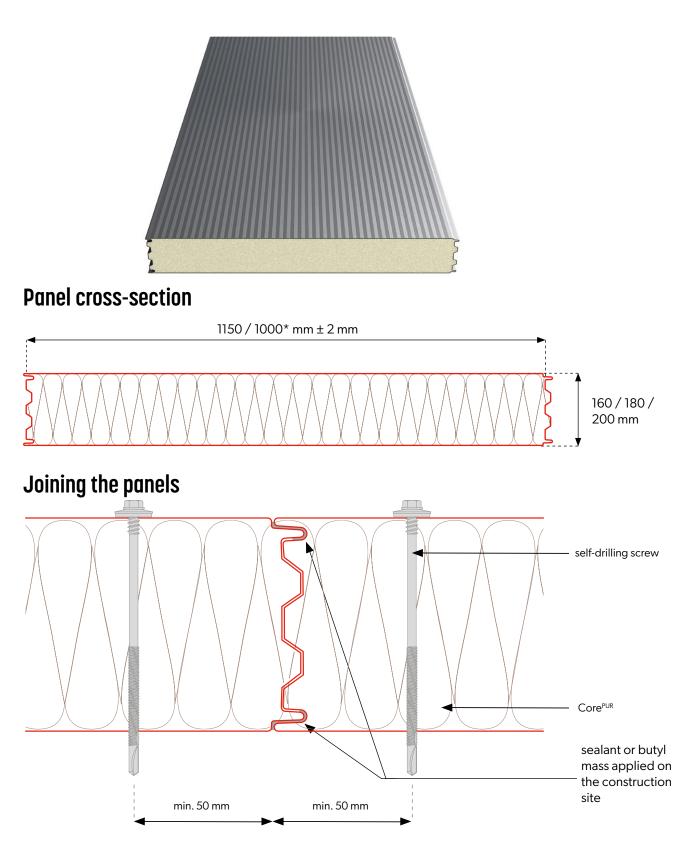



* Module availability is determined individually with the sales department..

Core	PUR										
Density [kg/m³]	40 ± 3										
PUR panel thickness [mm]	160	180	200								
Weight [kg/m²]	13,5	14,3	15,1								
Effective width [mm]	1150, 1000	*									
Total width [mm]	1171, 1021*										
Min. panel length [m]	2,0										
Max. panel length [m]	15,0	15,0									
Outer/inner sheet thickness [mm]	0,3-0,7 / 0	0,3-0,7 / 0,3-0,7									
U-value [W/m²K]	0,14 0,12 0,11										
Fire spread degree	NRO										
Type of external / internal profiling	[M], [T1], [R], [F] / [T1], [M], [F]								
External / internal corrosion resistance	C1, C2, C3 (C4 ÷ C5) / A1 (A2	2 ÷ A5)								
Standard coatings	Poliester In MULTILAYE		ester Standard [RAL], HERCULIT [HC],								
Special coatings	PVDF, PUR,	PVC (P), PVC (F)	- FoodSafe								
Accessories	fixing syste	em, seals, flashin	gs, rooflight								

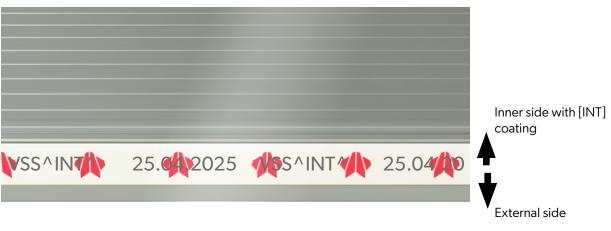


NOTE! The arrows marked with the symbol **^INT^** on the panel lock point to the **inner side** of the sandwich panel with the **[INT] INTERIOR** coating.

ightarrow *Module availability is agreed individually with the sales department.


External profiling

Internal profiling

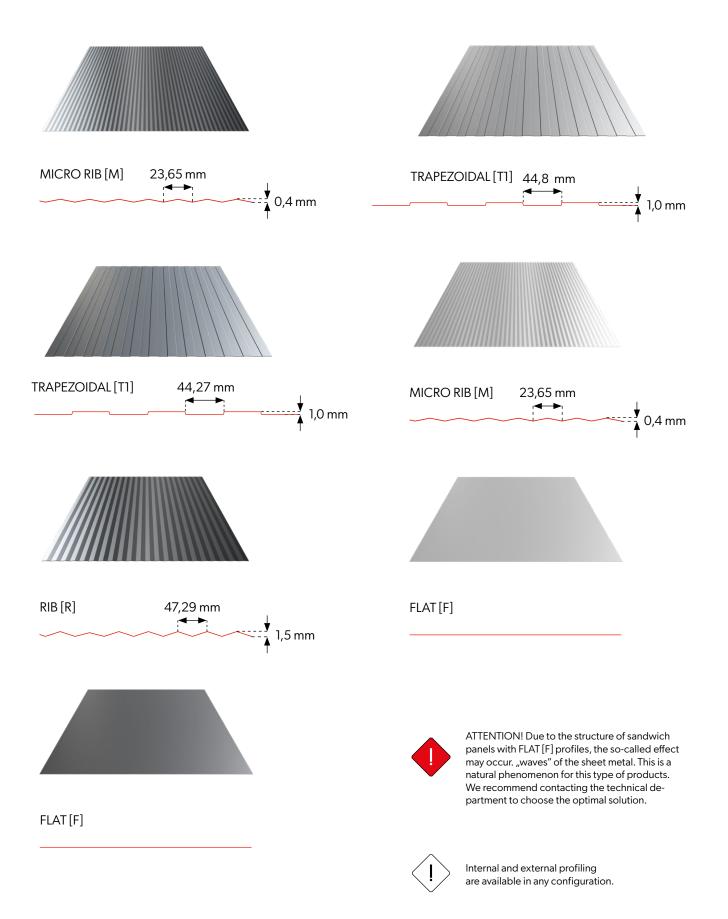

Coatings and colors

POLIESTER Interior [INT] - Available colors for interior cladding



POLIESTER Standard [RAL] - Available colors for exterior cladding



HC 3009 HC 7016 HC 8004

HC 8017

MULTILAYER 40 [MLT] - Available colors for exterior cladding





Printing technology does not allow faithful rendering of colors. Therefore the colors shown are indicative and may differ from actual colors.



HC 9005

In addition, on individual order, non-standard colors and coatings are available, outside the palette shown (PVDF, PUR, PVC (P), PVC (F) - FoodSafe).

Coating parameters

Code	Coating thickness	Corrosion resistance	UV resistance
POLIESTER Interior [INT]	15 μm	RA2	Not applicable
OLIESTER Standard [RAL]	25 μm	RC3	RUV2
IERCULIT [HC]	35 µm	RC4	RUV4
NULTILAYER 40 [MLT]	40 µm	RC3	RUV3

Notes

		_							_		_					_		
		 											 _					
		_											 					
		 _											 					
-						_					_						_	
		_																
		_																
		 	_															

04/2025/EN





Modular roofing tiles
MODULAR SERIES



Retro roof tiles RETRO SERIES



Steel roof gutter system
INGURI



FLAT METAL SHEETS



Roof Sandwich PANELS

Uncoiling and slitting SERVICES

Compact roofing tiles COMPACT SERIES



ROOT PANEL SERIES



TRAPEZOIDAL SHEETS



FLASHINGS



Wall Sandwich PANELS



Flat sheets and cutting SERVICES



Steel roofing tiles CLASSIC SERIES



INTEGRATED **PV PANELS**



STRUCTURAL PROFILES



ACCESORIES



SKRIN, LINEA



PERFORATION of sheets



VSS VSS

