






Product card

Roof sandwich panel




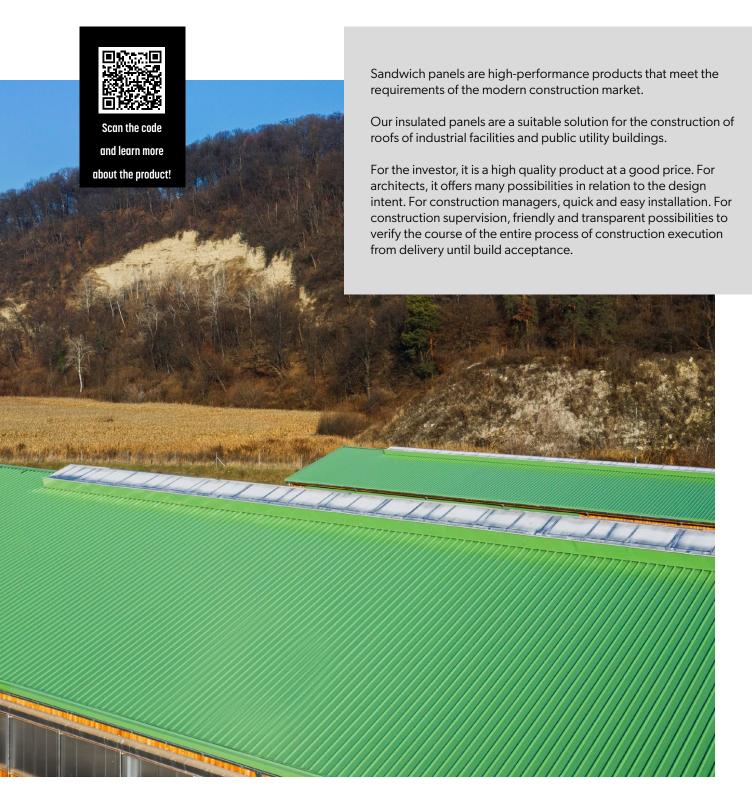


Technical information



Panel cross-section




Joining the panels

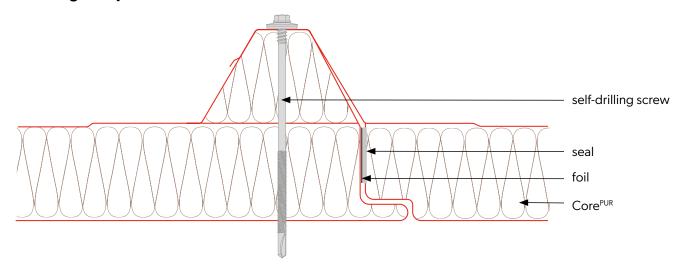

Technical information


Core	PUR						
Density [kg/m³]	40 ± 3						
PUR panel thickness [mm]	40	60	80	100	120	160	
Weight [kg/m²]	9,6	10,4	11,2	12,0	12,8	14,8	
Effective width [mm]	1050						
Total width [mm]	1127						
Min. panel length [m]	2,0						
Max. panel length [m]	15,0						
Outer/inner sheet thickness [mm]	0,3-0,7 / 0,3-0,7						
U-value [W/m²K]	0,55	0,37	0,28	0,22	0,18	0,14	
Reaction to external fire on the roof	B _{ROOF} (t1)						
Fire spread degree	NRO						
Type of external / internal profiling	[T40] / [T1], [M], [F]						
External / internal corrosion resistance	C1, C2, C3 (C4 ÷ C5) / A1 (A2 ÷ A5)						
Standard coatings	Poliester Interior [INT], Poliester Standard [RAL], HERCULIT [HC], MULTILAYER 40 [MLT]						
Special coatings	PVDF, PUR, PVC (P), PVC (F) - FoodSafe						
Accessories	fixing system, seals, flashings, rooflight SPR-SKY						

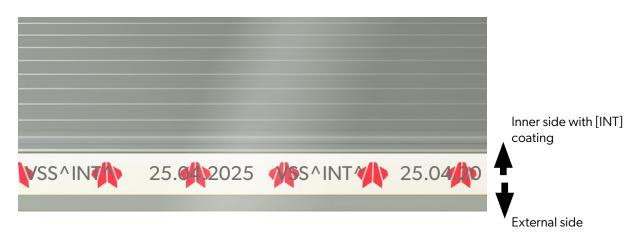

NOTE! The arrows marked with the symbol **^INT^** on the panel lock point to the **inner side** of the sandwich panel with the **[INT] INTERIOR** coating.

External profiling

profiling Internal profiling



TRAPEZOIDAL 40 [T40]

22,48 mm


40 mm




TRAPEZOIDAL [T1]

44,8 mm

1,0 mm







FLAT[F]



ATTENTION! Due to the structure of sandwich panels with FLAT [F] profiles, the so-called effect may occur. "waves" of the sheet metal. This is a natural phenomenon for this type of products. We recommend contacting the technical department to choose the optimal solution.



Internal and external profiling are available in any configuration.

Coatings and colors

POLIESTER Interior [INT] - Available colors for interior cladding



POLIESTER Standard [RAL] - Available colors for exterior cladding



HERCULIT [HC]



MULTILAYER 40 [MLT] - Available colors for exterior cladding





Printing technology does not allow faithful rendering of colors. Therefore the colors shown are indicative and may differ from actual colors.




In addition, on individual order, non-standard colors and coatings are available, outside the palette shown (PVDF, PUR, PVC (P), PVC (F) - FoodSafe).

Coating parameters

Code	Coating thickness	Corrosion resistance	UV resistance
POLIESTER Interior [INT]	15 μm	RA2	Not applicable
POLIESTER Standard [RAL]	25 μm	RC3	RUV2
HERCULIT [HC]	35 μm	RC4	RUV4
MULTILAYER 40 [MLT]	40 μm	RC3	RUV3

Notes

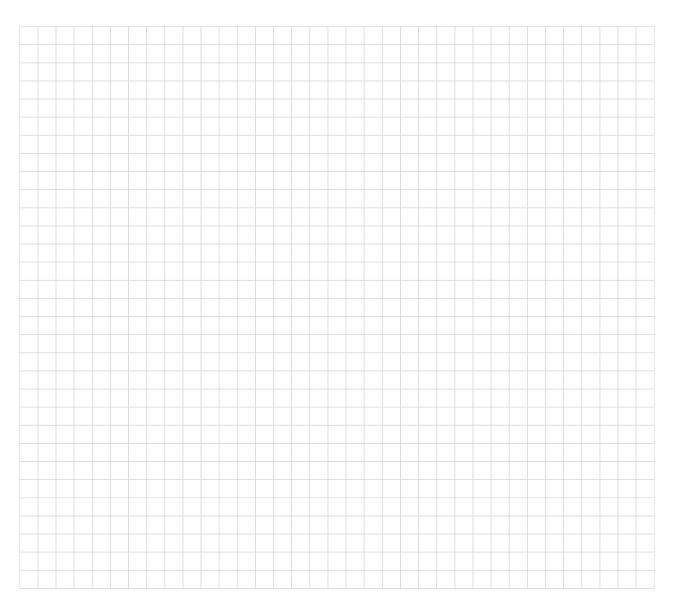





Modular roofing tiles
MODULAR SERIES



Compact roofing tiles
COMPACT SERIES



Steel roofing tiles
CLASSIC SERIES



RETRO SERIES



Roof panels

PANEL SERIES



INTEGRATED **PV PANELS**



Steel roof gutter system



TRAPEZOIDAL



STRUCTURAL



FLAT METAL



EL A CHIMOC



ACCESORIES



Roof Sandwich



Wall Sandwich



Facade cladding
SKRIN, LINEA



Uncoiling and slitting SERVICES



Flat sheets and cutting



PERFORATION of shoots





